

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
23 May 2002 (23.05.2002)

PCT

(10) International Publication Number  
WO 02/41531 A2

(51) International Patent Classification: H04B 7/26

(21) International Application Number: PCT/US01/45350

(22) International Filing Date:  
14 November 2001 (14.11.2001)

(25) Filing Language: English


(26) Publication Language: English

(30) Priority Data:  
09/713,696 15 November 2000 (15.11.2000) US(71) Applicant: QUALCOMM INCORPORATED [US/US];  
5775 Morehouse Drive, San Diego, CA 92121-1714 (US).(72) Inventors: VAYANOS, Alkinoos, Hector; 836 Diamond  
Street, San Diego, CA 92109 (US). GRILLI, Francesco;  
4210 Palo Verde Road, Irvine, CA 92612 (US).(74) Agent: WADSWORTH, Philip, R.; Baker, Kent D., Qual-  
comm Incorporated, 5775 Morehouse Drive, San Diego,  
CA 92121-1714 (US).(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI,  
SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA,  
ZW.(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,  
CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD,  
TG).

## Published:

— without international search report and to be republished  
upon receipt of that reportFor two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND APPARATUS FOR ALLOCATING DATA STREAMS ONTO A SINGLE CHANNEL

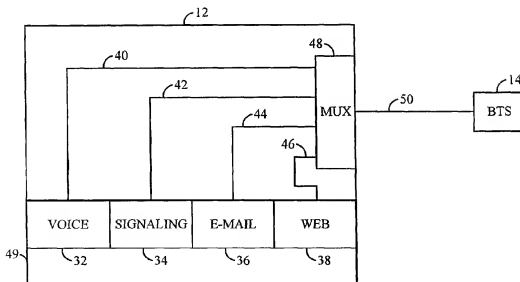

(57) Abstract: A method and system that enables multiplexing a plurality of data streams onto one data stream based on data stream priorities and available transport frame combinations (TFCs) is disclosed. A mobile station 12 has applications that produce separate data streams. Example applications include voice 32, signaling 34, E-mail 36 and web applications 38. The data streams are combined by a multiplexer module 48 into one data stream called the transport stream 50. The transport stream 50 is sent over the reverse link to base station transceivers (BTS) 14. The multiplexer module 48 multiplexes the data streams onto the transport stream according to their priorities and the available TFCs.

## METHOD AND APPARATUS FOR ALLOCATING DATA STREAMS ONTO A SINGLE CHANNEL

### BACKGROUND

5

#### I. Field

The present invention pertains generally to the field of communications and more specifically to a novel and improved system and  
10 method for allocating a plurality of data streams onto a single channel.

#### II. Background

A remote station is located within a network. The remote station  
15 includes applications that produce logical data streams. The remote station allocates the logical data streams onto a single transport stream. A technique for multiplexing data from logical data streams onto a transport stream is disclosed in U.S. Application Serial No. 09/612,825, filed February 8, 1999, entitled "METHOD AND APPARATUS FOR PROPORTIONATELY  
20 MULTIPLEXING DATA STREAMS ONTO ONE DATA STREAM," which is assigned to the assignee of the present invention and incorporated by reference herein.

Choosing an allocation scheme for allocating bits from multiple data streams onto a single channel is difficult because a number of factors have to  
25 be taken into consideration. One factor that has to be considered is the priority of each data stream. Higher priority data streams take precedence over lower priority data streams. Another factor that has to be considered is the type of transport format combinations (TFCs) that are allowed. A TFC is a combination of transport frames to be sent out on a wireless link of the  
30 remote station at each time slot. A transport format has a number of blocks (i.e. one or more blocks) and a block size. An allocation scheme that takes

into consideration the priority of data streams and the TFCs available is desired.

It is also desirable to have an allocation scheme that selects TFCs without having to pad the TFCs, which wastes valuable space. In addition, throughput is improved when TFC do not have to be padded because the TFCs that are transmitted over the transport channel are full. Some allocation schemes pad TFCs. In these padded allocation schemes, a TFC is padded when the TFC is not completely filled with bits from the logical data streams.

## SUMMARY

The presently disclosed method and apparatus are directed to allocating a plurality of data streams onto one data stream for transmission. A list of allowable TFCs is received from a network. Bits from data streams at a logical level are placed into TFCs at a transport level based on the priority of the data streams and the TFCs available.

In one aspect, a plurality of applications provides a plurality of data streams to be allocated to a single stream. In another aspect, subscriber units provide a plurality of data streams to be allocated to a single stream of a base station. In still another embodiment, a plurality of base stations provides a plurality of data streams to be multiplexed by a multiplexer within a base station controller. Multiplexer could be a processor or a processor capable of traditional multiplexing tasks such as combining multiple input streams of data into one output or separating into multiple output streams of data from a single input stream of data. Multiplexer could also be a processor capable of logical decisions or a processor capable of other operation functions.

In one aspect, a subscriber unit comprises a memory, a plurality of applications residing in the memory, each application producing a data stream wherein each data stream comprises at least one bit, and a

multiplexer configured to receive each data stream and uniformly distribute bits from the plurality of data streams onto a single data stream.

In one aspect, the multiplexer is configured to receive each data stream and uniformly distribute bits from the plurality of data streams onto a single data stream based on the proportion value.

In another aspect, a multiplexer is configured to receive each of a plurality of data streams and uniformly distribute bits from the plurality of data streams onto a single data stream based primarily on the data streams' proportion value and secondarily on the data streams' priority.

In still another aspect, a wireless communication system comprises a subscriber unit, a base station coupled to the subscriber unit, and a base station controller coupled to the base station. The subscriber unit includes a plurality of applications and a multiplexer, wherein each application produces a data stream as input to the multiplexer and each data stream comprises at least one bit. The multiplexer distributes bits from the data streams onto a single stream based on allowable TFCs not requiring padding.

### BRIEF DESCRIPTION OF THE DRAWINGS

The features, objects, and advantages of the present invention will become more apparent from the detailed description set forth below when taken in conjunction with the drawings in which like reference characters identify correspondingly throughout and wherein:

FIG. 1 is a schematic overview of an exemplary cellular telephone system;

FIG. 2 shows a block diagram of a mobile station and a base station in accordance with an embodiment;

FIGS. 3A-3B show a flowchart for the elimination of TFCs based on available bits in an embodiment; and

FIGS. 4A-4C show a flowchart for selecting a TFC in an exemplary embodiment.

## DETAILED DESCRIPTION

An exemplary cellular mobile telephone system in which the present invention is embodied is illustrated in FIG. 1. For purposes of example the exemplary embodiment is described herein within the context of a W-CDMA cellular communications system. However, it should be understood that the invention is applicable to other types of communication systems, such as personal communication systems (PCS), wireless local loop, private branch exchange (PBX), or other known systems. Furthermore, systems utilizing other well known multiple access schemes such as TDMA and FDMA as well as other spread spectrum systems may employ the presently disclosed method and apparatus.

As illustrated in FIG. 1, a wireless communication network 10 generally includes a plurality of mobile stations (also called mobiles, subscriber units, remote station, or user equipment) 12a-12d, a plurality of base stations (also called base station transceivers (BTSs) or Node B), 14a-14c, a base station controller (BSC) (also called radio network controller or packet control function 16), a mobile station controller (MSC) or switch 18, a packet data serving node (PDSN) or internetworking function (IWF) 20, a public switched telephone network (PSTN) 22 (typically a telephone company), and an Internet Protocol (IP) network 24 (typically the Internet). For purposes of simplicity, four mobile stations 12a-12d, three base stations 14a-14c, one BSC 16, one MSC 18, and one PDSN 20 are shown. It would be understood by those skilled in the art that there could be any number of mobile stations 12, base stations 14, BSCs 16, MSCs 18, and PDSNs 20.

In one embodiment the wireless communication network 10 is a packet data services network. The mobile stations 12a-12d may be any of a number of different types of wireless communication device such as a portable phone, a cellular telephone that is connected to a laptop computer running IP-based, Web-browser applications, a cellular telephone with an

associated hands-free car kit, a personal digital assistant (PDA) running IP-based, Web-browser applications, a wireless communication module incorporated into a portable computer, or a fixed location communication module such as might be found in a wireless local loop or meter reading system. In the most general embodiment, mobile stations may be any type of communication unit.

The mobile stations **12a-12d** may advantageously be configured to perform one or more wireless packet data protocols such as described in, for example, the EIA/TIA/IS-707 standard. In a particular embodiment, the mobile stations **12a-12d** generate IP packets destined for the IP network **24** and encapsulate the IP packets into frames using a point-to-point protocol (PPP).

In one embodiment the IP network **24** is coupled to the PDSN **20**, the PDSN **20** is coupled to the MSC **18**, the MSC **18** is coupled to the BSC **16** and the PSTN **22**, and the BSC **16** is coupled to the base stations **14a-14c** via wirelines configured for transmission of voice and/or data packets in accordance with any of several known protocols including, e.g., E1, T1, Asynchronous Transfer Mode (ATM), IP, PPP, Frame Relay, HDSL, ADSL, or xDSL. In an alternate embodiment, the BSC **16** is coupled directly to the PDSN **20**, and the MSC **18** is not coupled to the PDSN **20**. In one embodiment, the mobile stations **12a-12d** communicate with the base stations **14a-14c** over an RF interface defined in the 3<sup>rd</sup> Generation Partnership Project 2 "3GPP2", "Physical Layer Standard for cdma2000 Spread Spectrum Systems," 3GPP2 Document No. C.P0002-A, TIA PN-4694, to be published as TIA/EIA/IS-2000-2-A, (Draft, edit version 30) (Nov. 19, 1999) (hereinafter "cdma 2000"), which is fully incorporated herein by reference.

During typical operation of the wireless communication network **10**, the base stations **14a-14c** receive and demodulate sets of reverse-link signals from various mobile stations **12a-12d** engaged in telephone calls, Web browsing, or other data communications. Each reverse-link signal received

by a given base station 14a-14c is processed within that base station 14a-14c. Each base station 14a-14c may communicate with a plurality of mobile stations 12a-12d by modulating and transmitting sets of forward-link signals to the mobile stations 12a-12d. For example, as shown in FIG. 1, the base station 14a communicates with first and second mobile stations 12a, 12b simultaneously, and the base station 14c communicates with third and fourth mobile stations 12c, 12d simultaneously. The resulting packets are forwarded to the BSC 16, which provides call resource allocation and mobility management functionality including the orchestration of soft handoffs of a call for a particular mobile station 12a-12d from one base station 14a-14c to another base station 14a-14c. For example, a mobile station 12c is communicating with two base stations 14b, 14c simultaneously. Eventually, when the mobile station 12c moves far enough away from one of the base stations 14c, the call will be handed off to the other base station 14b.

If the transmission is a conventional telephone call, the BSC 16 will route the received data to the MSC 18, which provides additional routing services for interface with the PSTN 22. If the transmission is a packet-based transmission such as a data call destined for the IP network 24, the MSC 18 will route the data packets to the PDSN 20, which will send the packets to the IP network 24. Alternatively, the BSC 16 will route the packets directly to the PDSN 20, which sends the packets to the IP network 24.

The wireless communication channel through which information signals travel from a mobile station 12 to a base station 14 is known as a reverse link. The wireless communication channel through which information signals travel from a base station 14 to a mobile station 12 is known as a forward link.

CDMA systems are typically designed to conform to one or more standards. Such standards include the "TIA/EIA/IS-95-B Mobile Station-Base Station Compatibility Standard for Dual-Mode Wideband Spread Spectrum Cellular System" (the IS-95 standard), the "TIA/EIA/IS-98

Recommended Minimum Standard for Dual-Mode Wideband Spread Spectrum Cellular Mobile Station" (the IS-98 standard), the standard offered by a consortium named "3rd Generation Partnership Project" (3GPP) and embodied in a set of documents including Document Nos. 3G TS 25.211, 3G  
5 TS 25.212, 3G TS 25.213, 3G TS 25.311 and 3G TS 25.214 (the W-CDMA standard), the "TR-45.5 Physical Layer Standard for cdma2000 Spread Spectrum Systems" (the cdma2000 standard), and the "TIA/EIA/IS-856 cdma2000 High Rate Packet Data Air Interface Specification" (the HDR standard). New CDMA standards are continually proposed and adopted for  
10 use. These CDMA standards are incorporated herein by reference.

More information concerning a code division multiple access communication system is disclosed in U.S. Patent No. 4,901,307, entitled "SPREAD SPECTRUM MULTIPLE ACCESS COMMUNICATION SYSTEM USING SATELLITE OR TERRESTRIAL REPEATERS," and US. Pat. No.  
15 5,103,459, entitled "SYSTEM AND METHOD FOR GENERATING WAVEFORMS IN A CDMA CELLULAR TELEPHONE SYSTEM," both of which are assigned to the assignee of the present invention, and are incorporated in their entirety by reference herein.

CDMA 2000 is compatible with IS-95 systems in many ways. For  
20 example, in both the cdma2000 and IS-95 systems, each base station time-synchronizes its operation with other base stations in the system. Typically, the base stations synchronize operation to a universal time reference such as Global Positioning System (GPS) signaling; however, other mechanisms can be used. Based upon the synchronizing time reference, each base station in a  
25 given geographical area is assigned a sequence offset of a common pseudo noise (PN) pilot sequence. For example, according to IS-95, a PN sequence having  $2^{15}$  chips and repeating every 26.67 milliseconds (ms) is transmitted as a pilot signal by each base station. The pilot PN sequence is transmitted by each base station at one of 512 possible PN sequence offsets. Each base  
30 station transmits the pilot signal continually, which enables mobile stations to identify the base station's transmissions as well as for other functions.



In an exemplary embodiment, a mobile station communicates with a base station using wideband code division multiple access (W-CDMA) techniques. The base stations in a W-CDMA system operate asynchronously. That is, the W-CDMA base stations do not all share a common universal time reference. Different base stations are not time-aligned. Thus, although a W-CDMA base station has a pilot signal, a W-CDMA base station may not be identified by its pilot signal offset alone. Once the system time of one base station is determined, it cannot be used to estimate the system time of a neighboring base station. For this reason, a mobile station in a W-CDMA system use a three-step PERCH acquisition procedure to synchronize with each base station in the system. Each step in the acquisition procedure identifies a different code within a frame structure called a PERCH channel.

In an exemplary embodiment, a mobile station has a plurality of applications. The applications reside within the mobile station and each application produces a separate data stream. An application may produce more than one data stream.

FIG. 2 shows a block diagram of a mobile station 12 and a base station 14 in accordance with an exemplary embodiment. The mobile station 12 includes voice 32, signaling 34, E-mail 36 and web applications 38 residing in the memory 49 of the mobile station 12. Each application, voice 32, signaling 34, E-mail 36 and web application 38 produces a separate data stream 40, 42, 44, 46, respectively. The data streams are multiplexed by a multiplexer module 48 into one data stream called the transport stream 50. The transport stream 50 is sent over the reverse link to a base transceiver station 14 (BTS), also called a base station for short.

Each data stream 40-46 has a priority. The multiplexer module 48 places bits from data streams at a logical level into TFCs at the transport level based on the priority of the data streams and the TFCs available without having to pad the TFCs. Other systems pad TFCs that are not filled

with bits from the data streams. However, embodiments of the present invention do not pad the TFCs.

In an exemplary embodiment, the multiplexer module 48 operates within the media-access control (MAC) layer and gets the data stream priorities from a higher network layer. The MAC layer defines the procedures used to receive and transmit over the physical layer.

As would be apparent to one of ordinary skill in the art, the data streams 40-46 can be prioritized with any priority scheme known in the art, such as first-in-first-out (FIFO), last-in-first-out (LIFO), and shortest-job-first (SJF). As would be apparent to one of ordinary skill in the art, the multiplexer module 48 can operate on a plurality of network levels.

In another embodiment, the multiplexer module 48 is executed in hardware. In yet another embodiment, the multiplexer module 48 is executed in a combination of software and hardware. As would be apparent to one of ordinary skill in the art, the multiplexer module 48 can be executed by any combination of software and hardware.

In an embodiment, the multiplexer module 48 employs an allocation algorithm. For any given time slot, the allocation algorithm eliminates TFCs that need to be padded. Thus, only TFCs that do not need padding are valid. For a given time slot, TFCs needing padding are invalid.

If the allocation algorithm did not eliminate invalid TFCs, the allocation algorithm could select a TFC requiring padding. Selecting a TFC that allows the transmission of the most high priority bits may result in an invalid TFC being selected. The TFC could be invalid because the TFC selected results in high priority bits being transmitted, but there are bits available within the TFC for other lower priority logical channels. In order to avoid an invalid TFC being selected, it is necessary for the allocation algorithm of an embodiment to eliminate invalid TFCs before selecting a TFC.

A set of allowable TFCs is received from the network. The set is called the transport frame combination set (TFCs). The TFCs in the TFCs

are allowable in the sense that the network allows the TFCs to be transported through the network.

In one embodiment, the allocation algorithm has at least three steps as shown below:

5

(1) Set S1 to the set of TFCs in the TFCs that can be used based on the current maximum transmitter power;

(2) Set S2 to the set of TFCs in S1 that can be used based on the current  
10 bit availability from the different logical channels given that introducing "padding" blocks is not allowed; and

(3) Pick the TFC from S2 that allows the transmission of the most high priority bits.

15 In another embodiment, steps (1) and (2) are reversed. Another embodiment includes steps (2) and (3), but not step (1). Each one of the steps is described in more detail below.

In step (1), TFCs are eliminated from the set of allowable TFCs based on power requirements. Each TFC requires a certain amount of power in  
20 order to be transmitted. The power requirement for each TFC is computed. The TFCs that require more power than can be currently transmitted are eliminated. The TFCs that do not require more power than can be currently transmitted remain.

The second step is the elimination of remaining TFCs that require  
25 padding blocks based on available bits. The TFCs having available bits are eliminated. Each TFC is checked for empty blocks.

$BS_j$  is the block size and  $BSS_j$  is the block set size in the  $i$ th TFC (of the allowable TFCs) for the  $j$ th transport channel. Let  $B_k$  be the buffer occupancy for the  $k$ th logical channel corresponding to the  $i$ th transport channel. It is  
30 assumed that the block size and block set size are adjusted for the MAC header and that therefore there is a strict correspondence with the buffer

occupancy. A TFC is acceptable only if it cannot contain more bits than are available for any of the transport channels. The remaining pseudo-code for the elimination of TFCs based on available bits is shown below:

- 5           1.     Set  $S2 = S1$ .
2.     Let there be  $n$  transport channels numbered from 1 through  $n$ .
3.     Set  $i = 1$ . This will be the index for all transport channels.
4.     Let  $Sb$  be the set of block sizes that exist in any TFC in  $S2$  for the  $i^{\text{th}}$  transport channel.
- 10          5.     Pick a block size  $BS$  from  $Sb$ .
6.     Let  $St$  be the set of  $m$  TFCs in  $S2$ , numbered 1 through  $m$ , that have block size  $BS$  for the  $i^{\text{th}}$  transport channel.
7.     Set  $j = 1$ . This will be the index for the TFCs in  $St$ .
8.     Compute:  $T = BS \cdot \sum_k \left[ \frac{B_{ik}}{BS} \right]$ .
- 15          9.     If  $BSS_{ji} \leq T$  then go to 11. Where  $BSS_j$  corresponds to the  $i^{\text{th}}$  transport channel for the  $j^{\text{th}}$  TFC in  $St$ .
10.     $S2 = S2 - \{\text{TFC}j\}$ . Where TFCj is the  $j^{\text{th}}$  TFC in  $St$ .
11.     $j += 1$ .
12.    If  $j \leq m$  then go to step 9.
- 20          13.    Set  $Sb = Sb - \{BS\}$ .
14.    If  $Sb \neq \{\emptyset\}$  then go to step 5.
15.    Set  $i += 1$ .
16.    If  $i \leq n$  then go to step 4.
17.    The algorithm is complete and the valid TFCs are in  $S2$ .

25

FIGS. 3A-3B show a flowchart in one embodiment for the elimination of TFCs based on available bits. Set  $S2$  is set to  $S1$  100.  $S1$  is the set of allowable TFCs that do not require more power than can be transmitted. Let there be  $n$  transport channels numbered from 1 through  $n$

30 102. Initialize index  $i$  104. Index  $i$  is the index for the transport channels. Let  $Sb$  be the set of all block sizes that exist in any TFC in set  $S2$  for the  $i^{\text{th}}$  transport channel 106. Select block size  $BS$  from set  $Sb$  108. Let  $St$  be the set of  $m$  TFCs in set  $S2$ , numbered 1 through  $m$ , that have block size  $BS$  for the

$i^{\text{th}}$  transport channel 110. Initialize index  $j$  112. Index  $j$  is the index for the TFCs in set  $S_1$ . Compute a threshold  $T = BS \cdot \sum_k \left\lceil \frac{B_k}{BS} \right\rceil$  114. Threshold  $T$  is used to check whether there is too much space in a TFC. If the Block Set Size  $BSS_j \leq T$  116, then index  $j$  is incremented 118, otherwise there is too much space such that the TFC would require padding blocks and the TFC <sub>$j$</sub>  is removed from set  $S_2$  120 and index  $j$  is incremented 118. If there are more TFCs to process, i.e.,  $j \leq m$  then go back and check if the Block Set Size  $BSS_j \leq T$  116, otherwise subtract the entry with this block size from set  $S_b$  by the block size 124. If  $S_b$  is non-null 126, then go back and select another block size  $BS$  108, otherwise increment index  $i$  128. If all the transport channels have not been processed, i.e.,  $i \leq n$  130, then Let  $S_b$  be the set of all block sizes that exist in any TFC in set  $S_2$  for the next transport channel 106. If  $i > n$ , then all invalid TFCs have been removed from set of available TFC that do not require more power than can be transmitted. The valid TFCs are in set  $S_2$ .

In one embodiment, all of the TFCs with the same block size (on the  $i^{\text{th}}$  transport channel) are grouped in  $S_2$ . In another embodiment, TFCs with the same block size do not have to be grouped together. In this embodiment,  $T$  is computed every time a different TFC is examined.

The third step is the selection of the optimum TFC. Bits from the logical data streams are hypothetically loaded into the TFC. The loaded TFCs are compared based on the amount of high priority data they contain.

There are  $n$  priority levels,  $P_1$  through  $P_n$  with  $P_1$  being the highest priority. Let there be  $q$  TFCs in  $S_2$ , numbered from 1 to  $q$ . For each TFC in  $S_2$ , create a variable NOB (number of bits) and for each one of the transport channels on each TFC, create a variable SAS (still available space). All SAS shall be initialized to the corresponding TFC block set size.  $NOB_i$  and  $SAS_{ij}$  are the variables for the  $i^{\text{th}}$  TFC in  $S_2$  and the  $j^{\text{th}}$  transport channel.  $L_j$  is

the  $j$ th logical channel at priority level  $P_i$ . Then the following algorithm can be performed:

1. Set  $S3 = S2$ .
2. Set  $i = 1$ . This is going to be the index for the priority levels.
- 5 3. Initialize the NOBs for all TFCs in  $S3$  to 0.
4. Let  $m$  be the number of logical channels of priority  $P_i$ .
5. Set  $j = 1$ . This is going to be the index for the logical channels at the current priority level.
6. Let  $B_{ij}$  be the number of available bits for logical channel  $L_{ij}$ .
- 10 7. Let  $l$  be the transport channel on which logical channel  $j$  is mapped.
8. Set  $k = 1$ . This will be the index of TFCs in  $S3$ .
9. If  $\left\lceil \frac{B_{ij}}{BS} \right\rceil \cdot BS < SAS_M$  then go to step 13.
10.  $NOB_k += SAS_M$ .
11.  $SAS_M = 0$ .
- 15 12. Go to step 15.
13.  $NOB_k += \left\lceil \frac{B_{ij}}{BS} \right\rceil \cdot BS$ . (It is also possible to do:  $NOB_k += B_{ij}$ . But this makes the outcome order dependent.).
14.  $SAS_M = \left\lceil \frac{B_{ij}}{BS} \right\rceil \cdot BS$ .
15.  $k += 1$ .
- 20 16. If  $k \leq q$  then go to step 9.
17.  $j += 1$ ; Logical Channels
18. If  $j \leq m$  then go to step 6.
19. Keep in  $S3$  the TFCs for which the NOB is the highest.
20. If there is no TFC in  $S3$ , then go to the next time slot.
- 25 21. If there is a single TFC in  $S3$  then the algorithm is complete. The single TFC is used. Go to the next time slot.
22.  $i += 1$ ; Priority
23. If  $i \leq n$  then go to step 3.
24. Pick arbitrarily one of the TFCs in  $S3$ . Go to the next time slot.

FIGS. 4A-4C show a flowchart for selecting a TFC in an exemplary embodiment. Set S3 is set to set S2 140, which is the set of valid TFCs. Set S3 shall provide a set of TFCs that can be selected for transport. The index for the priority levels, index i is initialized 142. There is an NOB variable for all TFCs in set S3. NOB stands for number of bits. The NOB variables for all TFCs in S3 are initialized to zero 144. Let m be the number of logical channels of priority P<sub>1</sub> 146. The index for the logical channels at the current priority level, index j, is initialized to one 148. Let B<sub>ij</sub> be the number of available bits for logical channel L<sub>ij</sub> 150. Logical channels are mapped to transport channels. l is the transport channel on which logical channel j is mapped 152. Initialize the index of the TFCs in set S3, k, to one.

If there is still available space after filling B<sub>ij</sub>, i.e.,  $\left\lceil \frac{B_{ij}}{BS} \right\rceil \cdot BS < SAS_k$  156,

then increment NOB<sub>k</sub> by  $\left\lceil \frac{B_{ij}}{BS} \right\rceil \cdot BS_k$  158 and subtract  $\left\lceil \frac{B_{ij}}{BS} \right\rceil \cdot BS_k$  from SAS<sub>k</sub> 160.

Then, increment index k 166. If there is no available space after filling B<sub>ij</sub>, then increment the number of bits NOB<sub>k</sub> by SAS<sub>k</sub> 162 and reset SAS<sub>k</sub> to zero 164. Increment index k 166. If the TFCs in S2 have not been processed for this logical channel, i.e., if  $k \leq q$  168, then go back to fill more

TFCs, i.e.,  $\left\lceil \frac{B_{ij}}{BS} \right\rceil \cdot BS < SAS_k$  156. If the TFCs in S2 have been processed for this

logical channel, then increment index j 170. If index  $j \leq m$  then go back and let B<sub>ij</sub> be the number of available bits for logical channel L<sub>ij</sub> 150. Otherwise put the TFCs for which the NOB is the highest in set S3 174. If there is a single TFC in S3 180, then the single TFC is used 182. Go to the next time slot 178. If there is more than one TFC in S3, then increment index i 184. If  $i \leq n$  186, then go back and initialize the NOB variables for all TFCs in S3 to zero 144 and continue the algorithm. Otherwise, all transport channels have been processed. One of the TFCs in S3 can be arbitrarily chosen for transmission 188. Go to the next time slot 178.

As would be apparent to one of ordinary skill in the art, the TFC algorithm can be applied to other interconnections between network modules. It can be applied to any situation where a module has a plurality of inputs and produces a multiplexed output from the plurality of inputs.

- 5 For example, a multiplexer module can be located within a BTS wherein the BTS multiplexes data streams from a plurality of mobile stations and produces a multiplexed data stream to be sent to the BSC.

Thus, a novel and improved method and apparatus for multiplexing multiple data streams onto one data stream have been described. Those of  
10 skill in the art would understand that the various illustrative logical blocks, modules, and algorithm steps described in connection with the embodiments disclosed herein may be implemented as electronic hardware, computer software, or combinations of both. The various illustrative components, blocks, modules, circuits, and steps have been described  
15 generally in terms of their functionality. Whether the functionality is implemented as hardware or software depends upon the particular application and design constraints imposed on the overall system. Skilled artisans recognize the interchangeability of hardware and software under these circumstances, and how best to implement the described functionality  
20 for each particular application. As examples, the various illustrative logical blocks, modules, and algorithm steps described in connection with the embodiments disclosed herein may be implemented or performed with a processor executing a set of firmware instructions, an application specific integrated circuit (ASIC), a field programmable gate array (FPGA) or other  
25 programmable logic device, discrete gate or transistor logic, discrete hardware components such as, e.g., registers, any conventional programmable software module and a processor, or any combination thereof designed to perform the functions described herein. The multiplexer may advantageously be a microprocessor, but in the alternative,  
30 the multiplexer may be any conventional processor, controller, microcontroller, or state machine. The applications could reside in RAM



memory, flash memory, ROM memory, EPROM memory, EEPROM memory, registers, hard disk, a removable disk, a CD-ROM, or any other form of storage medium known in the art. As illustrated in FIG. 2, a base station 14 is advantageously coupled to a mobile station 12 so as to read  
5 information from the base station 14. The memory 49 may be integral to the multiplexer 48. The multiplexer 48 and memory 49 may reside in an ASIC (not shown). The ASIC may reside in a telephone 12.

The previous description of the embodiments of the invention is provided to enable any person skilled in the art to make or use the present  
10 invention. The various modifications to these embodiments will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other embodiments without the use of the inventive faculty. Thus, the present invention is not intended to be limited to the embodiments shown herein but is to be accorded the widest scope consistent  
15 with the principles and novel features disclosed herein.

**WE CLAIM:**     .

**CLAIMS**

1. A method for multiplexing a plurality of data streams onto one data  
2 stream, comprising:  
receiving a set of transport frame combinations from a network; and  
4 selecting a transport frame combination (TFC) from the received set  
based on whether at least one TFC in the received set can be filled with bits  
6 from a plurality of data streams.
2. The method of claim 1, further comprising filling the selected TFC  
2 with bits from the plurality of data streams.
3. The method of claim 2, further comprising scheduling the selected  
2 TFC for transport.
4. The method of claim 2, further comprising allocating the TFC to a  
2 single transport stream.
5. The method of claim 2, wherein the selecting a TFC is also based on  
2 the priority of the plurality of data streams.
6. The method of claim 2, further comprising comparing the selected  
2 TFC with other TFCs from the set of TFCs.
7. The method of claim 6, wherein the selected TFC includes more bits  
2 from the highest priority data stream than other TFCs in the set of TFCs.
8. The method of claim 6, wherein the selected TFC includes more high  
2 priority bits from the plurality of data streams as compared to other TFCs in  
the set of TFCs.

9. A subscriber unit, comprising:
- 2       a memory;
- 4       a plurality of applications residing in the memory, each application  
capable of producing a data stream, wherein each data stream  
comprises at least one bit; and
- 6       a multiplexer configured to receive each data stream, receive a set of  
TFCs, and select a TFC from the received set based on whether at least  
8       one TFC in the received set can be filled with bits from a plurality of  
data streams.
10. The subscriber unit of claim 9, wherein the multiplexer is configured to
- 2       fill the selected TFC with bits from the plurality of data streams.
11. The subscriber unit of claim 10, wherein the multiplexer is configured to
- 2       schedule the selected TFC for transport.
12.     The subscriber unit of claim 10, wherein the multiplexer is configured
- 2       to allocate the TFC to a single transport stream.
13. The subscriber unit of claim 10, wherein the multiplexer is configured to
- 2       select the TFC based on the priority of data streams.
14. The subscriber unit of claim 10, wherein the multiplexer is configured to
- 2       compare the selected TFC with other TFCs from the set of TFCs.
15. The subscriber unit of claim 14, wherein the multiplexer is configured to
- 2       select the TFC that includes more bits from the highest priority data  
stream of the plurality of data streams than other TFC in the set of TFCs.
16. The subscriber unit of claim 14, wherein the multiplexer is configured to
- 2       select the TFC that includes more high priority bits from the plurality of  
data streams as compared to other TFCs in the set of TFCs.

17. A base station, comprising:
- 2       a memory;
  - 4       a plurality of applications residing in the memory, each application capable of producing a data stream, wherein each data stream comprises at least one bit; and
  - 6       a multiplexer configured to receive each data stream, receive a set of TFCs, and select a TFC from the received set based on whether at least
  - 8       one TFC in the received set can be filled with bits from a plurality of data streams.
18. The base station of claim 17, wherein the multiplexer is configured to fill
- 2       the selected TFC with bits from the plurality of data streams based on the priorities of the plurality of data streams.
19. A base station controller, comprising:
- 2       a memory;
  - 4       a plurality of applications residing in the memory, each application capable of producing a data stream, wherein each data stream comprises at least one bit; and
  - 6       a multiplexer configured to receive each data stream, receive a set of TFCs, and select a TFC from the received set based on whether at least
  - 8       one TFC in the received set can be filled with bits from a plurality of data streams.
20. The base station controller of claim 19, wherein the multiplexer is
- 2       configured to fill the selected TFC with bits from the plurality of data streams based on the priorities of the plurality of data streams.
21.     An apparatus for combining data from a plurality of data sources for
- 2       transmission as a single data stream, the apparatus comprising:
    - a memory; and

4 a multiplexer, communicatively attached to said memory, said  
multiplexer for:  
6 receiving plural data streams from said data sources, each data  
stream comprising data blocks, containing a number of data bits, data  
8 blocks referred to as transport frames;  
multiplexing data from said plural data sources onto a single  
10 data stream in the form of multiple transport frames configured as  
transport frame combinations;  
12 receiving a set of transport frame combinations (TFCs); and ,  
selecting a TFC from the received set based on whether at least  
14 one TFC in the received set can be filled with bits from said plurality  
of data streams.

22. The apparatus of claim 21, wherein the multiplexer is also for filling  
2 the selected TFC with bits from the plurality of data streams

23. The apparatus of claim 22, wherein the multiplexer is also for  
2 scheduling the selected TFC for transport.

24. The apparatus of claim 22, wherein the multiplexer is also for  
2 allocating the TFC to a single transport stream.

25. The apparatus of claim 22, wherein the multiplexer is for selecting a  
2 TFC also based on the priority of the plurality of data streams.

26. The apparatus of claim 22, wherein the multiplexer is also for  
2 comparing the selected TFC with the other TFC's from the set of received  
TFCs.

27. The apparatus of claim 26, wherein the multiplexer is for selecting a  
2 TFC also based on whether the selected TFC has more bits from the highest  
priority data stream than other TFCs in the set of received TFCs.

28. The apparatus of claim 26, wherein the multiplexer is for selecting a  
2 TFC also based on whether the selected TFC includes more high priority bits  
from the plurality of data streams as compared to the other TFCs in the set  
4 of received TFCs.

29. A method for combining data from a plurality of data sources for  
2 transmission as a single data stream, the method comprising;  
receiving plural data streams from said data sources, each data stream  
4 comprising  
data blocks, containing a number of data bits, data blocks referred to as  
6 transport frames;  
multiplexing data from said plural data sources onto a single data  
8 stream in the  
form of multiple transport frames configured as transport frame  
10 combinations;  
receiving a set of transport frame combinations (TFCs) ; and ,  
12 selecting a TFC from the received set based on whether at least one  
TFC in the  
14 received set can be filled with bits from said plurality of data streams.

30. The method of claim 29, further comprising filling the selected TFC  
2 with bits from the plurality of data streams.

31. The method of claim 30, further comprising scheduling the selected  
2 TFC for transport.

32. The method of claim 30, further comprising allocating the TFC to a  
2 single transport stream.

33. The method of claim 30, wherein the selecting of a TFC is also based  
2 on the priority of the plurality of data streams.

34. The method of claim 30, further comprising comparing the selected  
2 TFC with the other TFC's from the set of received TFCs.
35. The method of claim 34, wherein the selecting of a TFC is also based  
2 on whether the TFC includes more bits from the highest priority data  
stream than other TFCs in the set of received TFCs.
36. The method of claim 34, wherein the selecting of a TFC is also based  
2 on whether the TFC includes more high priority bits from the plurality of  
data streams as compared to the other TFCs in the set of received TFCs.
37. A subscriber unit for combining data from a plurality of data sources  
2 for transmission as a single data stream comprising:  
a memory; and  
4 a multiplexer, communicatively attached to said memory, said  
multiplexer for:  
6 receiving plural data streams from said data sources, each data  
stream comprising data blocks, containing a number of data bits, data  
8 blocks referred to as transport frames;  
multiplexing data from said plural data sources onto a single  
10 data stream in the form of multiple transport frames configured as  
transport frame combinations;  
12 receiving a set of transport frame combinations (TFCs); and,  
selecting a TFC from the received set based on whether at least  
14 one TFC in the received set can be filled with bits from said plurality  
of data streams
38. The subscriber unit of claim 37, wherein the multiplexer is also for  
2 filling the selected TFC with bits from the plurality of data streams
39. The subscriber unit of claim 38, wherein the multiplexer is also for  
2 scheduling the selected TFC for transport.

40. The subscriber unit of claim 38, wherein the multiplexer is also for  
2 allocating the TFC to a single transport stream.
41. The subscriber unit of claim 38, wherein the multiplexer is for  
2 selecting a TFC also based on the priority of the plurality of data streams.
42. The subscriber unit of claim 38, wherein the multiplexer is also for  
2 comparing the selected TFC with the other TFC's from the set of received  
TFCs.
43. The subscriber unit of claim 42, wherein the multiplexer is for  
2 selecting a TFC also based on whether the selected TFC has more bits from  
the highest priority data stream than other TFCs in the set of received TFCs.
44. The subscriber unit of claim 42, wherein the multiplexer is for  
2 selecting a TFC also based on whether the selected TFC includes more high  
priority bits from the plurality of data streams as compared to the other TFCs  
4 in the set of received TFCs.
45. A base station for combining data from a plurality of data sources for  
2 transmission as a single data stream comprising:  
a memory; and  
4 a multiplexer, communicatively attached to said memory, said  
multiplexer for:  
6 receiving plural data streams from said data sources, each data  
stream comprising data blocks, containing a number of data bits, data  
8 blocks referred to as transport frames;  
multiplexing data from said plural data sources onto a single  
10 data stream in the form of multiple transport frames configured as  
transport frame combinations;  
12 receiving a set of transport frame combinations (TFCs); and,



14 selecting a TFC from the received set based on whether at least  
one TFC in the received set can be filled with bits from said plurality  
of data streams.

46. The base station of claim 45, wherein the multiplexer is also for filling  
2 the selected TFC with bits from the plurality of data streams

47. The base station of claim 46, wherein the multiplexer is also for  
2 scheduling the selected TFC for transport.

48. The base station of claim 46, wherein the multiplexer is also for  
2 allocating the TFC to a single transport stream.

49. The base station of claim 46, wherein the multiplexer is for selecting  
2 a TFC also based on the priority of the plurality of data streams.

50. The base station of claim 46, wherein the multiplexer is also for  
2 comparing the selected TFC with the other TFC's from the set of received  
TFCs.

51. The base station of claim 50, wherein the multiplexer is for selecting a  
2 TFC also based on whether the selected TFC has more bits from the highest  
priority data stream than other TFCs in the set of received TFCs.

52. The base station of claim 50, wherein the multiplexer is for selecting  
2 a TFC also based on whether the selected TFC includes more high priority  
bits from the plurality of data streams as compared to the other TFCs in the  
4 set of received TFCs.

53. A subscriber unit for combining data from a plurality of data sources  
2 for transmission as a single data stream comprising:

- means for receiving plural data streams from said data sources, each  
4 data stream comprising data blocks, containing a number of data bits, data  
blocks referred to as transport frames;  
6 means for multiplexing data from said plural data sources onto a  
single data  
8 stream in the form of multiple transport frames configured as transport  
frame combinations;  
10 means for receiving a set of transport frame combinations (TFCs);  
and,  
12 means for selecting a TFC from the received set based on whether at  
least one TFC in the received set can be filled with bits from said plurality of  
14 data streams.

54. A base station for combining data from a plurality of data sources for  
2 transmission as a single data stream comprising:  
means for receiving plural data streams from said data sources, each  
4 data stream comprising data blocks, containing a number of data bits, data  
blocks referred to as transport frames; and  
6 means for multiplexing data from said plural data sources onto a  
single data  
8 stream in the form of multiple transport frames configured as transport  
frame combinations;  
10 means for receiving a set of transport frame combinations (TFCs);  
and,  
12 means for selecting a TFC from the received set based on whether at  
least one TFC in the received set can be filled with bits from said plurality of  
14 data streams.

55. A system for communicating data comprising:  
2 a number of subscriber units comprising;  
a memory; and

4           a multiplexer , communicatively attached to said memory,  
said multiplexer for:

6           receiving plural data streams from said data sources,  
each data stream comprising data blocks, containing a number  
8           of data bits, data blocks referred to as transport frames;  
multiplexing data from said plural data sources onto a  
10          single data stream in the form of multiple transport frames  
configured as transport frame combinations;

12          receiving a set of transport frame combinations (TFCs);  
and,

14          selecting a TFC from the received set based on whether  
at least one TFC in the received set can be filled with bits from  
16          said plurality of data streams;

and,

18          a number of base stations comprising;  
a memory; and

20          a multiplexer , communicatively attached to said memory,  
said multiplexer for:

22          receiving plural data streams from said data sources,  
each data stream comprising data blocks, containing a number  
24          of data bits, data blocks referred to as transport frames;  
multiplexing data from said plural data sources onto a  
26          single data stream in the form of multiple transport frames  
configured as transport frame combinations;

28          receiving a set of transport frame combinations (TFCs);  
and

30          selecting a TFC from the received set based on whether  
at least one TFC in the received set can be filled with bits from  
32          said plurality of data streams.

1/7

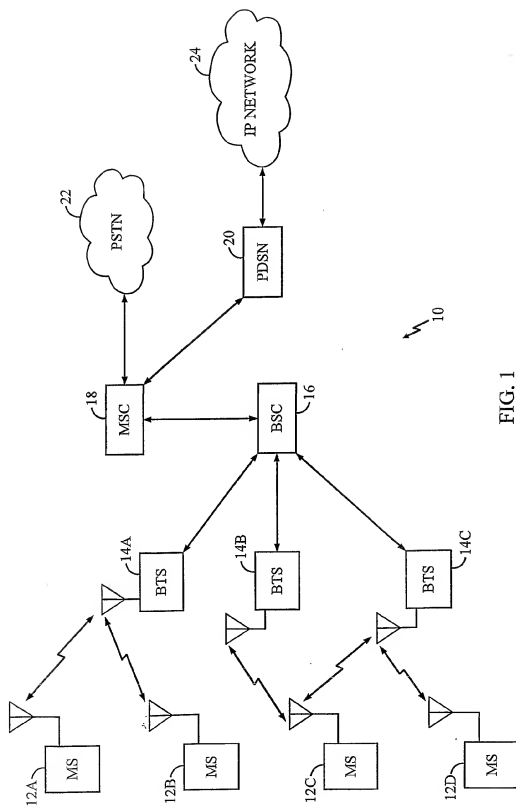


FIG. 1

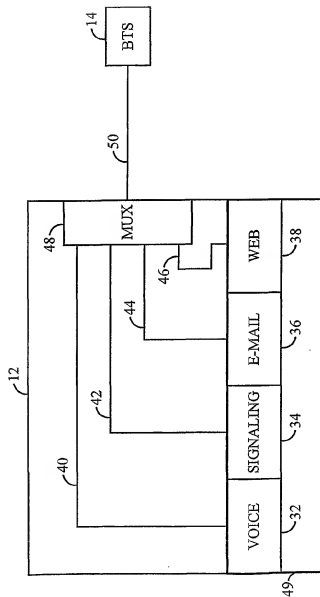


FIG. 2

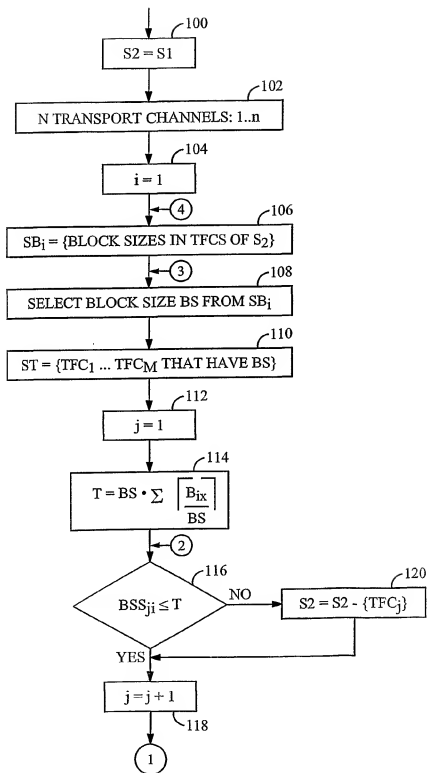


FIG. 3A

4/7

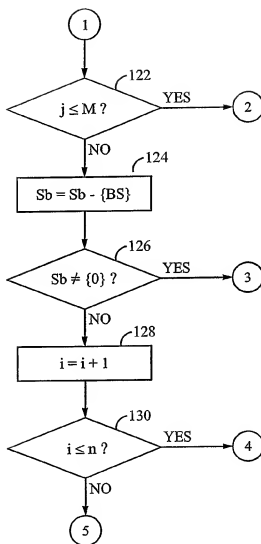


FIG. 3B

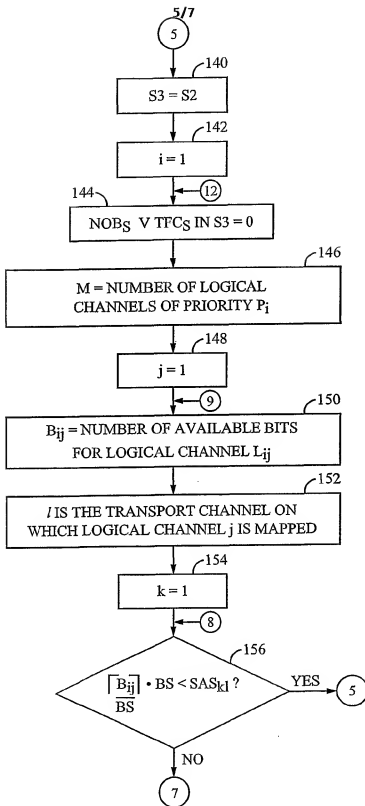


FIG. 4A



6/7

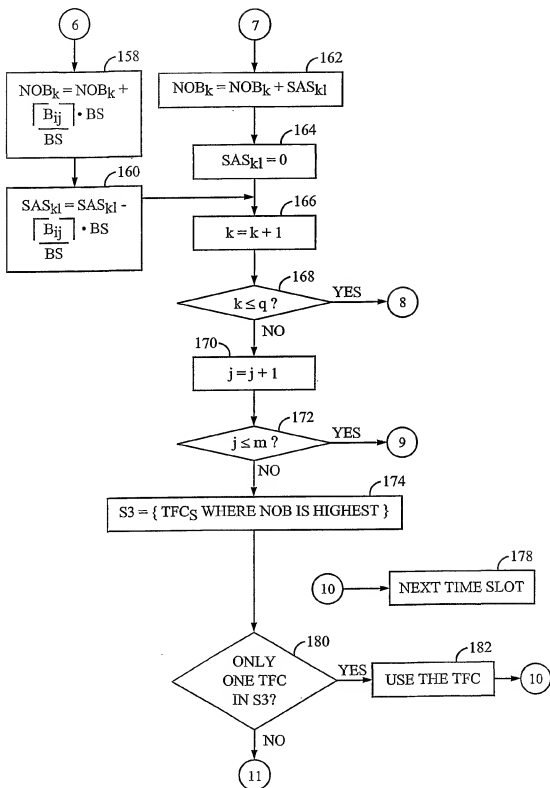


FIG. 4B

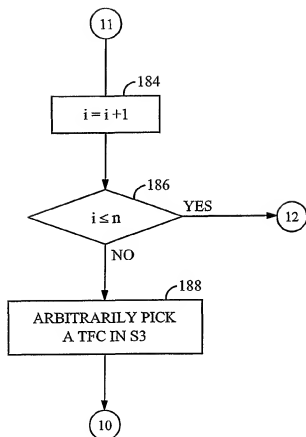


FIG. 4C

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
23 May 2002 (23.05.2002)


PCT

(10) International Publication Number  
WO 02/041531 A3

- (51) International Patent Classification: **H04B 7/26**
- (21) International Application Number: PCT/US01/45350
- (22) International Filing Date:  
14 November 2001 (14.11.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
09/713,696 15 November 2000 (15.11.2000) US
- (71) Applicant: **QUALCOMM INCORPORATED** [US/US];  
5775 Morehouse Drive, San Diego, CA 92121-1714 (US).
- (72) Inventors: **VAYANOS, Alkinoos, Hector**; 836 Diamond Street, San Diego, CA 92109 (US). **GRILLI, Francesco**; 4210 Palo Verde Road, Irvine, CA 92612 (US).
- (74) Agent: **WADSWORTH, Philip, R.**; Baker, Kent D., Qualcomm Incorporated, 5775 Morehouse Drive, San Diego, CA 92121-1714 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SF, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— with international search report
- (88) Date of publication of the international search report:  
26 September 2002

*[Continued on next page]*

(54) Title: METHOD AND APPARATUS FOR ALLOCATING DATA STREAMS ONTO A SINGLE CHANNEL

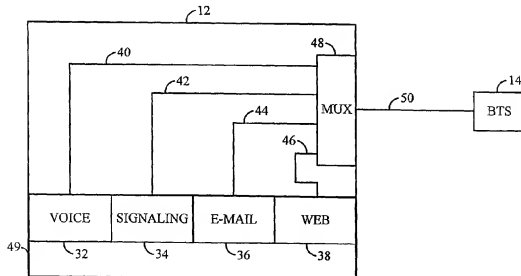

(57) Abstract: A method and system that enables multiplexing a plurality of data streams onto one data stream based on data stream priorities and available transport frame combinations (TPCs) is disclosed. A mobile station 12 has applications that produce separate data streams. Example applications include voice 32, signaling 34, E-mail 36 and web applications 38. The data streams are combined by a multiplexer module 48 into one data stream called the transport stream 50. The transport stream 50 is sent over the reverse link to base station transceivers (BTS) 14. The multiplexer module 48 multiplexes the data streams onto the transport stream according to their priorities and the available TPCs.



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## INTERNATIONAL SEARCH REPORT

 International Application No.  
 PCT/US 01/45350

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04B7/26

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1 001 642 A (MITSUBISHI ELECTRIC INF TECH) 17 May 2000 (2000-05-17) column 4, line 6 - line 51 column 4, line 56 - column 5, line 46 column 7, line 11 - line 34 column 10, line 50 - column 11, line 4 ----	1-55
A	WO 00 28760 A (NOKIA NETWORKS OY ; RINNE MIKKO (FI); SALONEN JANNE (FI); AHMAVAARA) 18 May 2000 (2000-05-18) page 11, line 19 - line 30 page 13, line 11 - page 14, line 14 ----	1-55
A	WO 99 66736 A (NOKIA MOBILE PHONES LTD ; TURUNEN MATTI (FI); KALLIOKULJU JUHA (FI)) 23 December 1999 (1999-12-23) page 1, line 23 - line 35 page 5, line 15 - line 26; figure 2 ----- -/--	1-55

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (see specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "S" document member of the same patent family

Date of the actual completion of the international search

2 July 2002

Date of mailing of the international search report

10/07/2002

Name and mailing address of the ISA

 European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2260 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Sorrentino, A

## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 01/45350

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 991 218 A (LG ELECTRONICS INC) 5 April 2000 (2000-04-05) column 2, line 48 -column 3, line 23 column 4, line 11 - line 31 -----	1-55

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No.

PCT/US 01/45350

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1001642	A	17-05-2000	FR 2785758 A1 EP 1001642 A1	12-05-2000 17-05-2000
WO 0028760	A	18-05-2000	FI 982417 A AU 1273800 A BR 9915079 A CN 1325601 T EP 1125460 A2 WO 0028760 A2	07-05-2000 29-05-2000 17-07-2001 05-12-2001 22-08-2001 18-05-2000
WO 9966736	A	23-12-1999	FI 981401 A AU 4784899 A EP 1095489 A2 WO 9966736 A2	17-12-1999 05-01-2000 02-05-2001 23-12-1999
EP 0991218	A	05-04-2000	EP 0991218 A2	05-04-2000